





Contents

2	PFAS-free
4	Commander Fire Extinguishers
16	CommanderEDGE Fire Extinguishers
32	Contempo Fire Extinguishers
34	Trolleys and Covers
36	Stands
38	Cabinets
40	Fire Blankets
42	Signs
46	Alarms
48	Toolkit Essentials
50	Service Tools
52	Services
53	Recycling





The Green Range



The Green Range has now extended to a fully PFAS-free (Perfluoroalkyl and Polyfluoroalkyl Substances) solution of portable fire extinguishers across the Commander and CommanderEDGE portfolio. Receive the same level of quality, performance, and innovation that you have come to know of our products, but now, fluorine-free.

The Green Crosshair is now a permanent feature across the Commander and CommanderEDGE range of fire extinguishers, signifying their PFAS-free contents. It is conveniently placed within the certifications section of the cylinder for ease of reference.





Water

FIRE EXTINGUISHER

6 LITRE WATER

21 A



**Use upright
Pull out safety pin**



**Free hose
Aim nozzle
at base of fire**



Squeeze handles



WARNING:
Do not use on liquid fires
Depressurise and recharge after any use
Check weight at least once a year
Protect from frost

For use on wood, paper, textile and similar
Class A fires.
Tested to BS EN3-7 . Safe for inadvertent use on electrical fires.

COMMANDER

CheckFire Ltd, Caerphilly, CF83 3HU



The trusted go-to brand for fire extinguishers in the UK, Commander offers a comprehensive range of high-performance, industry-compliant fire extinguishers.

Now PFAS-free across the entire range, Commander is proud to boast one of the widest ranges of options available on the market today and time has proven these portable fire extinguishers as the dependable choice for almost any installation requirement - with reliable performance guaranteed.

** Note: Some product imagery is subject to change in the near future and will be updated accordingly*



COMMANDER

Water Fire Extinguishers


A popular choice for Class A fires (combustible materials), Commander Water Fire Extinguishers work by cooling the fuel and ensuring it burns at a much slower pace until the fire is extinguished. With ease of maintenance and PFAS-free contents, it's easy to see why our water fire extinguishers are the preferred choice for many businesses.

Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved*
- PFAS-free
- Full range of spare parts available
- Plastic base skirt for protection
- Corrosion-resistant finish
- Five-year warranty**

**Selected units only*

***See our terms and conditions*

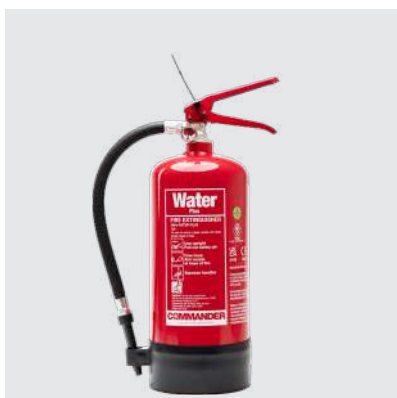

**3ltr
Water**

CODE
FX-WWA-003-DCF

CAPACITY
3LTR

FIRE RATING
13A

EXTINGUISHER MEDIUM
WATER

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



**6ltr
Water**

CODE
FX-PWA-006-DCF

CAPACITY
6LTR

FIRE RATING
21A

EXTINGUISHER MEDIUM
WATER

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



**9ltr
Water**

CODE
FX-PWA-009-DCF

CAPACITY
9LTR

FIRE RATING
27A

EXTINGUISHER MEDIUM
WATER

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL





Foam Fire Extinguishers


Specified for installation in settings where there is a Class B (flammable liquids) risk in enclosed spaces, the new Commander range of Fluorine-Free Foam Fire Extinguishers work by creating a dense foam blanket that rapidly spreads above the fuel surface, suppressing the oxygen supply which quickly extinguishes the fire. This also creates a cooling effect that prevents reignition.

Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved*
- PFAS-free
- Full range of spare parts available
- Plastic base skirt for protection
- Corrosion-resistant finish
- Five-year warranty**

**Select units only*

***See our terms and conditions*

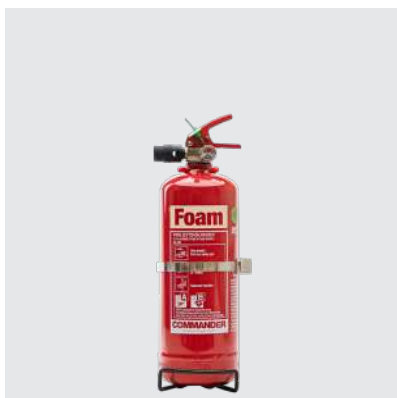

**2ltr
Foam**

CODE
FX-FFF-002-ACF

CAPACITY
2LTR

FIRE RATING
5A 34B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



**3ltr
Foam**

CODE
FX-FFF-003-ACF

CAPACITY
3LTR

FIRE RATING
13A 55B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



**6ltr
Foam**

CODE
FX-FFF-006-DCF

CAPACITY
6LTR

FIRE RATING
21A 144B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



**9ltr
Foam**

CODE
FX-FFF-009-DCF

CAPACITY
9LTR

FIRE RATING
27A 183B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL





Powder Fire Extinguishers

The Commander Powder range of PFAS-free fire extinguishers are extremely versatile. Suitable for use on Class A (combustible materials), Class B (flammable liquids) in open spaces, and Class C (flammable gas) fires, it's for this reason they're known as 'ABC' extinguishers. Powder fire extinguishers smother fires by producing a thick barrier between the fuel and the source of oxygen.

Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved*
- PFAS-free
- Full range of spare parts available
- Plastic base skirt for protection
- Corrosion-resistant finish
- Five-year warranty**

**Selected units only*

***See our terms and conditions*



**1kg
Powder**

CODE
FX-PWD-001-DCF

CAPACITY
1KG

FIRE RATING
8A 34B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**2kg
Powder**

CODE
FX-PWD-002-DCF

CAPACITY
2KG

FIRE RATING
13A 70B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**3kg
Powder**

CODE
FX-PWD-003-DCF

CAPACITY
3KG

FIRE RATING
13A 89B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**4kg
Powder**

CODE
FX-PWD-004-DCF

CAPACITY
4KG

FIRE RATING
21A 89B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**6kg
Powder**

CODE
FX-PWD-006-DCF

CAPACITY
6KG

FIRE RATING
27A 144B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**9kg
Powder**

CODE
FX-PWD-009-DCF

CAPACITY
9KG

FIRE RATING
34A 233B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL





COMMANDER

CO2 Fire Extinguishers

As well as being suitable for Class B (flammable liquid) fires, CO2 fire extinguishers are the ideal choice for installation in electrical fire risk settings because it limits damage to electrical equipment or machinery via its non-conductive properties. They work by starving the fire of oxygen, ensuring the fire no longer burns. The 2kg and 5kg Commander CO2 are among the finest on the market, while the Commander Renovate range are a cost effective and economical solution.

Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved*
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty***
- Supplied with safe horn**

**Selected units only*

***See our terms and conditions*

****Horns not included with Commander Renovates and will need to be ordered separately*



**2kg CO2
Steel**

CODE
FX-CO2-002-DCF

CAPACITY
2KG

FIRE RATING
34B

EXTINGUISHER MEDIUM
CO2

WORKING PRESSURE
56 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**5kg CO2
Steel**

CODE
FX-CO2-005-DCF

CAPACITY
5KG

FIRE RATING
70B

EXTINGUISHER MEDIUM
CO2

WORKING PRESSURE
56 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**2kg CO2
Renovated**

CODE
FX-CO2-002-ECF

CAPACITY
2KG

FIRE RATING
34B

EXTINGUISHER MEDIUM
CO2

WORKING PRESSURE
56 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
ALUMINIUM



**5kg CO2
Renovated**

CODE
FX-CO2-005-ECF

CAPACITY
5KG

FIRE RATING
70B

EXTINGUISHER MEDIUM
CO2

WORKING PRESSURE
56 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
ALUMINIUM





Wet Chemical Fire Extinguishers

A wet chemical fire extinguisher is specifically designed for use on Class F fires (cooking oils and fats), making it the ideal solution for the demands of commercial kitchen and canteen environments. This type of extinguisher works by creating a layer of foam on the burning oil or fat, stopping the supply of oxygen so the fire isn't fueled any further. The new Commander 6ltr Wet Chemical is not only PFAS free, the unit also now features a bell bottom hose, allowing a Class F fire to be extinguished much more effectively.

Features

- Kitemarked and manufactured to BS EN3
- PFAS-free
- New bell-bottom hose
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty*

**See our terms and conditions*



**6ltr
Wet Chemical**

CODE
FX-WCH-006-DCF

CAPACITY
6LTR

FIRE RATING
13A 75F

EXTINGUISHER MEDIUM
WET CHEMICAL

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL





Foam

FIRE EXTINGUISHER
6 LITRE OF FIRE EXTINGUISHING AGENT AB
27 A - 144 B

For use on burning liquid fires (Class B) and
wood, paper, textile and similar Class A fires

 Use upright.
Pull out safety pin.

 Free hose.
Aim nozzle
at base of fire.

 Squeeze handles.

 **A**  **B**

Can be used for extinguishing of electric
devices up to 1000V - keep the distance min. 1m.
Depressurise and recharge after any use.
Check weight at least once a year. Protect from frost.

COMMANDER EDGE

CheckFire Ltd, Sir Alfred Owen Way, Pontygarinddy Industrial Estate, Caerphilly, CF83 3HU
Manufacturer: OGNIOPHON S.A. ul. Przemysłowa 42, 34-120 Andrychów, Poland



The home of innovation and elite performing fluorine-free fire extinguishers, the CommanderEDGE range boasts a number of reliable high performing and extensively tested fire extinguishers.

The range is fully Kitemarked by BSI and is the choice of the professional installer with its mix of performance, quality and value. CommanderEDGE is also home to brand exclusive fire extinguishers, including the enviroFoam Fluorine-Free Foam range and the LFX Lithium-ion Battery Fire Extinguisher range.

** Note: Some product imagery is subject to change in the near future and will be updated accordingly*



Water Fire Extinguishers

Ideal for Class A fire risk areas (those featuring combustible materials), water-based extinguishers remain a popular choice for many businesses. Directed at the base of the fire, this extinguisher releases water to cool the fuel, ensuring it burns at a slow pace until completely extinguished. The CommanderEDGE Water Fire Extinguisher range features a variety of PFAS-free options; from the new enviroWater range, to a Water Mist, the range prioritises high performance and superb quality.

Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved*
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty**

**Selected units only*

***See our terms and conditions*



3ltr Water

CODE
FX-FFW-003-CCF

CAPACITY
3LTR

FIRE RATING
13A

EXTINGUISHER MEDIUM
WATER + ADDITIVE

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
0°C to +60°C

CYLINDER MATERIAL
STEEL



6ltr Water

CODE
FX-FFW-006-CCF

CAPACITY
6LTR

FIRE RATING
27A

EXTINGUISHER MEDIUM
WATER + ADDITIVE

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
0°C to +60°C

CYLINDER MATERIAL
STEEL



9ltr Water

CODE
FX-FFW-009-CCF

CAPACITY
9LTR

FIRE RATING
43A

EXTINGUISHER MEDIUM
WATER + ADDITIVE

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
0°C to +60°C

CYLINDER MATERIAL
STEEL



6ltr Water Mist

CODE
FX-WMS-006-CCF

CAPACITY
6LTR

FIRE RATING
13A 40F

EXTINGUISHER MEDIUM
WATER

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



6ltr Low Freeze Additive

CODE
FX-WLF-006-DCF

CAPACITY
6LTR

FIRE RATING
13A

EXTINGUISHER MEDIUM
**WATER + ANTI FREEZE
ADDITIVE**

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
-10°C to +60°C

CYLINDER MATERIAL
STEEL



9ltr Low Freeze Additive

CODE
FX-WLF-009-DCF

CAPACITY
9LTR

FIRE RATING
21A

EXTINGUISHER MEDIUM
**WATER + ANTI FREEZE
ADDITIVE**

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
-10°C to +60°C

CYLINDER MATERIAL
STEEL





enviroFoam Fire Extinguishers

The new and improved CommanderEDGE enviroFoam Fluorine-Free Fire Extinguisher range has been designed and developed to support the ever-growing demand and legislation for a PFAS-free foam fire-fighting solutions. Available in 3ltr, 6ltr and 9ltr capacities to support a range of enclosed Class B risk settings, it creates a layer of dense foam that rapidly forms a blanket on the surface of the fire. The foam blanket helps to cool the fire, further preventing reignition.

Features

- Kitemarked and manufactured to BS EN3
- MER approved
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty*

**See our terms and conditions*



**3ltr
Foam**

CODE
FX-FFF-003-CCF

CAPACITY
3LTR

FIRE RATING
13A 70B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
0°C to +60°C

CYLINDER MATERIAL
STEEL



**6ltr
Foam**

CODE
FX-FFF-006-CCF

CAPACITY
6LTR

FIRE RATING
27A 144B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
0°C to +60°C

CYLINDER MATERIAL
STEEL



**9ltr
Foam**

CODE
FX-FFF-009-CCF

CAPACITY
9LTR

FIRE RATING
34A 183B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
15 BAR @ 20°C

TEMPERATURE RANGE
0°C to +60°C

CYLINDER MATERIAL
STEEL





Powder Fire Extinguishers

The CommanderEDGE range of Powder Fire Extinguishers are an extremely versatile option, suitable for use on Class A (combustible materials), Class B (flammable liquids) in open spaces, and Class C (flammable gas) fires. It's for this reason they're known as 'ABC' fire extinguishers. The extinguisher smothers fires by producing a thick barrier between the fuel and the source of oxygen.

Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved*
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty**

**Selected units only*

***See our terms and conditions*



**6kg
Powder**

CODE
FX-PWD-006-CCF

CAPACITY
6KG

FIRE RATING
43A 233B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL



**9kg
Powder**

CODE
FX-PWD-009-CCF

CAPACITY
9KG

FIRE RATING
55A 233B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STEEL






CO2 Fire Extinguishers

The CommanderEDGE Aluminium CO2 Fire Extinguisher range are suitable for Class B (flammable liquid) fires, as well as Electrical fire risk settings as they limit damage to electrical equipment or machinery due to their non-conductive properties. They work by starving the fire of oxygen ensuring the fire no longer burns. The CommanderEDGE CO2 2kg squat bodies allow for ease of handling, while the 5kg unit offers a high performance 70B fire rating.

Features

- Kitemarked and manufactured to BS EN3
- MED/MER approved
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- Supplied with safe horn
- Five-year warranty*

**See our terms and conditions*

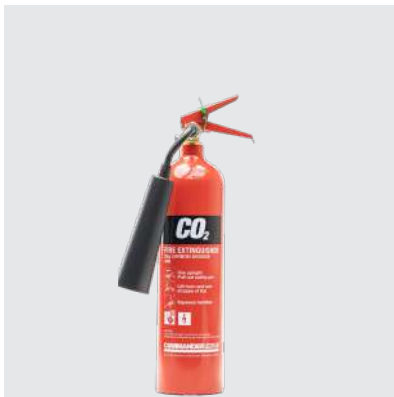

2kg
CO2 Aluminium

CODE
FX-COA-002-DCF

CAPACITY
2KG

FIRE RATING
34B

EXTINGUISHER MEDIUM
CO2

WORKING PRESSURE
56 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
ALUMINIUM



5kg
CO2 Aluminium

CODE
FX-COA-005-DCF

CAPACITY
5KG

FIRE RATING
70B

EXTINGUISHER MEDIUM
CO2

WORKING PRESSURE
56 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
ALUMINIUM






Wet Chemical Fire Extinguishers

Designed specifically for tackling Class F fires (cooking oils and fats), the CommanderEDGE 3ltr Wet Chemical Fire Extinguisher is the ideal solution for canteen and commercial kitchen environments. The new CommanderEDGE 3ltr Wet Chemical is now Kitemarked to BS EN3, PFAS-free and is an exceptional powerhouse for its size, boasting an 8A 75F fire rating

Features

- Kitemarked and manufactured to BS EN3
- PFAS-free
- New bell-bottom hose
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty*

**See our terms and conditions*

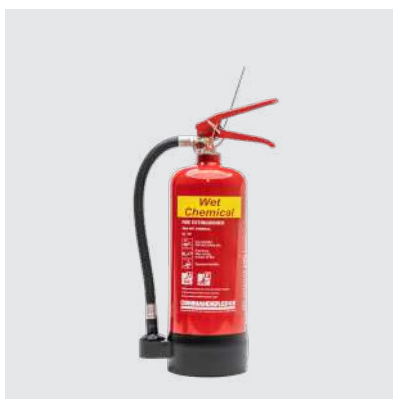

**3ltr
Wet Chemical**

CODE
FX-WCH-003-DCF

CAPACITY
3LTR

FIRE RATING
8A 75F

EXTINGUISHER MEDIUM
WET CHEMICAL

WORKING PRESSURE
12 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL





COMMANDEREDGE

LFX🔥 Lithium-ion Fire Extinguishers

The LFX range has been designed and developed in response to the rapidly growing use of lithium-ion batteries and their unique fire risks. Using a water-based agent that discharges as an endothermic foam, LFX breaks down the chain reaction in thermal runaway and cools the temperature of the batteries, absorbing significantly more heat than water alone. It also protects from secondary A-class fires, extinguishing any 'peripheral' fires potentially caused by exploding batteries.

Features

- Kitemarked to BS EN3*
- Manufactured to BS EN3
- NTA 8133 Certified**
- MED and MER approved
- PFAS-free
- Full range of spare parts available
- Corrosion-resistant finish
- LFX refills available
- Five-year warranty***

**Kitemark applies to Class A rating*

***NTA 8133 applies to 6ltr and 9ltr units only*

****See our terms and conditions*



**3ltr
LFX**

CODE
FX-LFX-003-ACF

CAPACITY
3LTR

FIRE RATING
13A

EXTINGUISHER MEDIUM
LFX

WORKING PRESSURE
20 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



**6ltr
LFX**

CODE
FX-LFX-006-ACF

CAPACITY
6LTR

FIRE RATING
27A

EXTINGUISHER MEDIUM
LFX

WORKING PRESSURE
20 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL



**9ltr
LFX**

CODE
FX-LFX-009-ACF

CAPACITY
9LTR

FIRE RATING
34A

EXTINGUISHER MEDIUM
LFX

WORKING PRESSURE
20 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STEEL





BRIDGEHILL®

WE SIMPLY BLOCK FIRE

EV Fire Blankets

Suitable for a range of applications, from standard size vehicles, to larger SUVs and industrial forklifts, the Bridgehill Fire Blanket range is the fastest and safest way to contain and extinguish a large-scale lithium-ion battery fire. CheckFire are proud to introduce Bridgehill fire blankets into the LFX range of Lithium-ion battery fire safety solutions.

Features

- DIN SPEC 91489:2024-11 ready
- Suitable for electric vehicles and fossil fuel vehicles
- 1600°C short term exposure
- 1200°C long term exposure
- Made from Pyroxene with a proprietary coating
- 10 year warranty
- Supplied in air tight weather and chemical resistant bag



Car Standard Blankets

CAR STANDARD -
FB-CAR-001-BGH
6 X 8M

CAR STANDARD XL -
FB-CAR-002-BGH
8 X 10M

CAR STANDARD TRAINING BLANKET -
FB-CAR-101-BGH
6 X 8M



Forklift / Pallet Truck Blankets

PALLET TRUCK -
FB-FKL-001-BGH
5 X 5M

FORK LIFT -
FB-FKL-002-BGH
7 X 7M

FORK LIFT TRAINING BLANKET -
FB-FKL-101-BGH
7 X 7M



Lithium Blankets

LITHIUM BLANKET SMALL -
FB-LIB-001-BGH
1.8 X 1.8M

LITHIUM BLANKET LARGE -
FB-LIB-002-BGH
3 X 4M



Extreme Blankets

EXTREME SMALL -
FB-EXT-001-BGH
1.5 X 1.5M

EXTREME MEDIUM -
FB-EXT-002-BGH
3 X 3M

EXTREME LARGE -
FB-EXT-003-BGH
5 X 5M



Car Pro Blankets

CAR PRO -
FB-CAR-003-BGH
6 X 8M


CAR PRO XL -
FB-CAR-004-BGH
7.5 X 10M

*** FOR USE BY TRAINED PROFESSIONALS ONLY**



Fire Cabinet

CB-GBH-001-BLK
90 X 30 X 35CM



The very finest interior finishes are beautifully researched and designed. Contempo provides stunning hand-finished extinguishers to complement the most exquisite interior - and nine litre models can be available on request.

Features

- Manufactured to BS EN3
- Full range of spare parts available
- Corrosion-resistant finish
- Five-year warranty*
- Super strong base skirt for protection
- Polyethylene internal lining (on water units)

**See our terms and conditions*

Contempo Stainless Steel

With a superb highly polished finish, luxury stainless steel extinguishers are perfect for areas where appearance is important.



**2kg CO2
Aluminium**

CODE
CX-CO2-002-DSS

CAPACITY
2KG

FIRE RATING
34B

EXTINGUISHER MEDIUM
CO2

WORKING PRESSURE
56 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
ALUMINIUM

PRESSURING GAS
NITROGEN



**6ltr Water
Stainless Steel**

CODE
CX-PWA-006-DSS

CAPACITY
6LTR

FIRE RATING
13A

EXTINGUISHER MEDIUM
WATER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
+5°C to +60°C

CYLINDER MATERIAL
STAINLESS STEEL

PRESSURING GAS
NITROGEN



**6kg Powder
Stainless Steel**

CODE
CX-PWD-006-DSS

CAPACITY
6KG

FIRE RATING
34A 183B C

EXTINGUISHER MEDIUM
ABC POWDER

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
-30°C to +60°C

CYLINDER MATERIAL
STAINLESS STEEL

PRESSURING GAS
NITROGEN



**6ltr Foam
Stainless Steel**

CODE
CX-FFF-006-DSS

CAPACITY
6LTR

FIRE RATING
21A 144B

EXTINGUISHER MEDIUM
FLUORINE-FREE FOAM

WORKING PRESSURE
14 BAR @ 20°C

TEMPERATURE RANGE
0°C to +60°C

CYLINDER MATERIAL
STAINLESS STEEL

PRESSURING GAS
NITROGEN





Trolleys and Covers

Trolleys and Fire Point Stands ensure all relevant fire safety equipment and ancillaries are both stored efficiently and easily transportable, offering the utmost practicality. While fire extinguisher covers provides an economical solution for protection for your fire safety equipment.

To support a variety of settings, we have also developed a range of fire safety bundles including our cabinets and stands range. Browse the entire offering, including exclusive LFX bundles, on [CheckFire.co.uk](https://www.checkfire.co.uk).



Flat-pack Fire Point Stand

CODE
CON-STD-01

CAPACITY
17KG

EXTERNAL DIMS (WHD)
1830 X 600 X 530MM


FIRE EXTINGUISHERS
2-3

SIMPLE 3 STEP ASSEMBLY

ROBUST NYLON WHEELS AND STEEL FRAME

LARGE BACKBOARD INCLUDED FOR ANCILLARY AND SIGN MOUNTING

BUNDLES AVAILABLE



Flat-pack Compact Trolley

CODE
CON-STD-02

CAPACITY
8.9KG

EXTERNAL DIMS (WHD)
1460 X 430 X 430MM

FIRE EXTINGUISHERS
2

SIMPLE 3 STEP ASSEMBLY

ROBUST NYLON WHEELS AND STEEL FRAME

SPACE FOR FIRE BUCKET

BACKBOARD INCLUDED FOR ANCILLARY AND SIGN MOUNTING

BUNDLES AVAILABLE



Flat-pack Triple Fire Point Stand

CODE
CON-STD-03

CAPACITY
44.1KG

EXTERNAL DIMS (WHD)
1460 X 430 X 430MM

FIRE EXTINGUISHERS
2-3

SIMPLE ASSEMBLY

ROBUST NYLON WHEELS AND STEEL FRAME

EXTRA BRACKETS AND SIDE PANELS ALLOW FOR ADDITIONAL FIRST AID AND SPILL KIT DISPLAY

BUNDLES AVAILABLE



Compact Double Trolley

CODE
CS23A

CAPACITY
14KG

EXTERNAL DIMS (WHD)
1200 X 470 X 400MM

FIRE EXTINGUISHERS
2

ROBUST POWDER COATED STEEL FRAME

NYLON WHEELS

SPACE FOR ALARM BELL / SITE ALARM

COMPAC. SPACE SAVING DESIGN



LFX Construction Stand Bundles

CODE
**BN-SD-001-LFX
BN-SD-002-LFX
BN-SD-003-LFX
BN-SD-004-LFX**

CAPACITY
17KG

EXTERNAL DIMS (WHD)
1830 X 600 X 530MM

FIRE EXTINGUISHERS
2-3

SIMPLE 3 STEP ASSEMBLY

ROBUST NYLON WHEELS AND STEEL FRAME

LARGE BACKBOARD INCLUDED FOR ANCILLARY AND SIGN MOUNTING



Mobile Fire Point Stand

CODE
CON-FPS-001-RED

CAPACITY
20KG

EXTERNAL DIMS (WHD)
1800 X 890 X 480MM

FIRE EXTINGUISHERS
2-3

ROBUST POWDER COATED STEEL FRAME

NYLON WHEELS

SPACE FOR FIRE BUCKET

SPACE FOR ALARM BELL / SITE ALARM

A LARGE STEEL BACKBOARD FOR MOUNTING ALARM EQUIPMENT AND SIGNAGE

ALSO AVAILABLE IN YELLOW, GREEN AND BLUE



PVC Extinguisher Cover (Medium)

CODE
CS22

FITS UP TO 6KG / 6LTR FIRE EXTINGUISHERS

QUALITY PVC MATERIAL

CLEAR VIEWING WINDOW

VELCRO STRAPS TO ALLOW FOR EASE OF FITTING AND SECURING



PVC Extinguisher Cover (Large)

CODE
CS21

FITS UP TO 9KG / 9LTR FIRE EXTINGUISHERS

QUALITY PVC MATERIAL

CLEAR VIEWING WINDOW

VELCRO STRAPS TO ALLOW FOR EASE OF FITTING AND SECURING



Stands

In settings where wall mounting isn't feasible, fire extinguisher stands offer a practical solution to protecting fire extinguishers from accidental damage and misuse while ensuring obvious and easy access. With no drilling or specialist tools required, the CheckFire range of extinguisher stands are available in a range of finishes and designs and offer a resilient, fuss-free way to display and protect fire extinguishers.

Features

- Dedicated area for application of signage
- Provide easy and obvious access
- No drilling or tools required
- Suitable for most fire extinguishers
- Various designs and finishes available
- Easily relocate as needed



Commander Single Extinguisher Stand

CODE
CS50

WEIGHT
1.2KG

DIMENSIONS
280 X 750 X 275MM

SUITABLE FOR
MAX 200MM

**RELIABLE AND ROBUST
POLY-PROPYLENE
PLASTIC MATERIAL**

**GRIPPED BASE TO
PROTECT FLOOR
SURFACE**

**EASILY COMBINE TO
MAKE A TRIPLE PLUS
STAND**

**INSERTS SOLD
SEPARATELY**



Commander Double Extinguisher Stand

CODE
CS51 | CS51A

WEIGHT
2.3KG

DIMENSIONS
548 X 750 X 288.5MM

SUITABLE FOR
MAX 200MM

**RELIABLE AND ROBUST
POLY-PROPYLENE
PLASTIC MATERIAL**

**GRIPPED BASE TO
PROTECT FLOOR
SURFACE**

**EASILY COMBINE TO
MAKE A TRIPLE PLUS
STAND**

**INSERTS SOLD
SEPARATELY**



Single Tubular Stand

CODE
CS30

WEIGHT
1.75KG

DIMENSIONS
840 X 390 X 300MM

**BASE GRIPS FOR
FLOOR PROTECTION**

**STRONG AND
LIGHTWEIGHT,
ALLOWING FOR EASY
TRANSPORTATION**

**SUITABLE FOR -
EXTINGUISHER SIZES
2KG/LTR - 9KG/LTR
WITH THE EXCEPTION
OF A 5KG CO2**



Double Tubular Stand

CODE
CS31

WEIGHT
2.5KG

DIMENSIONS
840 X 500 X 300MM

**BASE GRIPS FOR
FLOOR PROTECTION**

**STRONG AND
LIGHTWEIGHT,
ALLOWING FOR EASY
TRANSPORTATION**

**SUITABLE FOR -
EXTINGUISHER SIZES
2KG/LTR - 9KG/LTR
WITH THE EXCEPTION
OF A 5KG CO2**



Single Tubular Stand

CODE
CS32

WEIGHT
1.75KG

DIMENSIONS
840 X 390 X 300MM

**BASE GRIPS FOR
FLOOR PROTECTION**

**STRONG AND
LIGHTWEIGHT,
ALLOWING FOR EASY
TRANSPORTATION**

**AVAILABLE IN
STAINLESS STEEL,
ANTIQUE COPPER
AND POLISHED GOLD**

**SUITABLE FOR -
EXTINGUISHER SIZES
2KG/LTR - 9KG/LTR
WITH THE EXCEPTION
OF A 5KG CO2**



Double Tubular Stand

CODE
CS33

WEIGHT
2.5KG

DIMENSIONS
840 X 500 X 300MM

**BASE GRIPS FOR
FLOOR PROTECTION**

**STRONG AND
LIGHTWEIGHT,
ALLOWING FOR EASY
TRANSPORTATION**

**AVAILABLE IN
STAINLESS STEEL,
ANTIQUE COPPER
AND POLISHED GOLD**

**SUITABLE FOR -
EXTINGUISHER SIZES
2KG/LTR - 9KG/LTR
WITH THE EXCEPTION
OF A 5KG CO2**



Cabinets

While placement of the right fire extinguisher is vital, it's just as important that every measure is taken to protect them from corrosion, damage and vandalism. More than simply being advisory, this requirement is stipulated within the British Standards. The Commander Cabinet range is ideal for installation in any setting and provide peace of mind that fire extinguishers are protected from the elements, vandalism and accidental misuse.

Features

- Single and double cabinets available
- Offer extremely robust shock protection
- Internal seal protects against dust and water ingress*
- UV and chemical resistance
- Manufactured from poly-propylene
- IP59K rated

**Not applicable to single cabinets*



Single Commander Cabinet

CODE
CS01-DA9

CAPACITY
9KG/9LTR/2KG CO2

EXTERNAL DIMS (WHD)
335 X 715 X 240MM

INTERNAL DIMS (WHD)
264 X 652 X 204MM

FULLY WEATHER
RESISTANT

RESISTANT
TO CHEMICALS

INNOVATIVE INTERNAL
CLAMP SYSTEM



Single Cabinet Extended

CODE
CS02-DA

CAPACITY
9KG/9LTR/5KG CO2

EXTERNAL DIMS (WHD)
335 865 X 240MM

INTERNAL DIMS (WHD)
264 X 816 X 204MM

FULLY
WEATHER SEALED

RESISTANT
TO CHEMICALS

INNOVATIVE INTERNAL
CLAMP SYSTEM



LFX Single Cabinet

CODE
CB-LI-003-LFX

CAPACITY
1 X 6LTR/9LTR

EXTERNAL DIMS (WHD)
335 X 715 X 240MM

INTERNAL DIMS (WHD)
264 X 652 X 204MM

FULLY
WEATHER SEALED

RESISTANT
TO CHEMICALS

INNOVATIVE INTERNAL
CLAMP SYSTEM



LFX Double Cabinet

CODE
CB-LI-002-LFX

CAPACITY
2 X 6LTR

EXTERNAL DIMS (WHD)
616 X 735 X 270MM

INTERNAL DIMS (WHD)
530 X 700 X 229MM

FULLY
WEATHER SEALED

RESISTANT
TO CHEMICALS

INNOVATIVE INTERNAL
CLAMP SYSTEM



Double Cabinet

CODE
CS03-DA

CAPACITY
2 X 9KG/9LTR/2KG CO2

EXTERNAL DIMS (WHD)
616 X 735 X 270MM

INTERNAL DIMS (WHD)
530 X 700 X 229MM

FULLY
WEATHER SEALED

RESISTANT
TO CHEMICALS

INNOVATIVE INTERNAL
CLAMP SYSTEM

MANUFACTURED
FROM PP

LOCKABLE

ALSO AVAILABLE IN
YELLOW, GREEN AND
BLUE



Commander Double Lockable Cabinet

CODE
CS03A-DA

CAPACITY
2 X 9KG/9LTR/2KG CO2

EXTERNAL DIMS (WHD)
616 X 735 X 270MM

INTERNAL DIMS (WHD)
530 X 700 X 229MM

FULLY
WEATHER SEALED

RESISTANT
TO CHEMICALS

INNOVATIVE INTERNAL
CLAMP SYSTEM

MANUFACTURED FROM
POLYPROPYLENE

LOCKABLE



Vehicle Extinguisher Cabinet 6kg / 9kg

CODE
CS04-DA / CS05-DA

CAPACITY
**1 X 140/160MM
EXTINGUISHER**

EXTERNAL DIMS (WHD)
265 X 284 X 595MM

INTERNAL DIMS (WHD)
224 X 224 X 561MM

NYLON HANDLE
SEALABLE OR
LOCKABLE

REINFORCED AND
NON DEFORMABLE
STRUCTURE

INTERNAL TPE SEAL
AGAINST WATER AND
DUST

OPTIONAL BRACKETS
CAN BE MOUNTED
ON ANY SIDE



Commander Safety Box

CODE
CS60

CAPACITY
4 X 6LTR/6KG

EXTERNAL DIMS (WHD)
655 X 520 X 570MM

INTERNAL DIMS (WHD)
536 X 420 X 537MM

HIGH RESISTANCE
TO: WATER AND DUST
INGRESS, UV RAYS,
HIGH AND LOW
TEMPERATURES

SMOOTH, FLAT LID
FOR SIGN
APPLICATION

ERGONOMIC SIDE
HANDLES FOR EASY
CARRYING

ALSO AVAILABLE WITH
COMMANDER CONTACT
ALARM - SEE PAGE 47



Fire Blankets



Fire Blankets provide additional fire safety in a kitchen or catering setting, or in the event of clothing fires. Available in a range of sizes, covering the flames with a fire blanket cuts the supply of oxygen to the contents of a pan, or a person's clothing, suffocating the fire.

Features

- Supplied with rigid case
- Available in a range of sizes
- Kitemarked and manufactured to BS EN 1869



**Commander
Fire Blanket**

CODE
FB01

SIZE
1.1 X 1.1M

BLANKET MATERIAL
**SILOCOE COATED
FIBERGLASS FABRIC**

OUTER CASE MATERIAL
POLY-PROPYLENE CASE

WARRANTY
5 YEARS



**Commander
Fire Blanket**

CODE
FB02

SIZE
1.2 X 1.2M

BLANKET MATERIAL
**SILOCOE COATED
FIBERGLASS FABRIC**

OUTER CASE MATERIAL
POLY-PROPYLENE CASE

WARRANTY
5 YEARS



**Commander
Fire Blanket**

CODE
FB03

SIZE
1.8 X 1.2M

BLANKET MATERIAL
**SILOCOE COATED
FIBERGLASS FABRIC**

OUTER CASE MATERIAL
POLY-PROPYLENE CASE

WARRANTY
5 YEARS





Fire Extinguisher Signs

Signage for fire safety is vital to ensure everyone is aware of the correct procedures to follow and actions to take in the event of a fire. From fire extinguisher identification to fire exit signs, deploying mandatory fire safety signs comply with regulations is simple with our photoluminescent, high quality range. Our range of emergency escape signs help to clearly communicate where the nearest emergency exit and direct people safely off the premises. Whilst our fire action, equipment and door signs ensure that all users of the building are aware of the location of fire doors in event of emergency and understand exactly what action to take.

Features

- Photoluminescent as standard
- Contempo finishes available for selected signs
- Various dimensions available
- Manufactured to BS 5499-1:2011



Water ID Sign

CODE
101P / 111P

SIZES
75 X 200MM
150 X 100MM



Foam Spray ID Sign

CODE
SN-FS-118-PHL
SN-FS-158-PHL

SIZES
75 X 200MM
150 X 100MM



CO2 ID Sign

CODE
103P / 113P

SIZES
75 X 200MM
150 X 100MM



Powder ID Sign

CODE
104P / 114P

SIZES
75 X 200MM
150 X 100MM



Wet Chemical ID Sign

CODE
105P / 115P

SIZES
75 X 200MM
150 X 100MM



Fire Blanket ID Sign

CODE
106P / 116P

SIZES
75 X 200MM
150 X 100MM



Lithium-ion ID Sign

CODE
SN-LI-119-PHL /
SN-LI-159-PHL

SIZES
75 X 200MM
150 X 100MM



Water Mist ID Sign

CODE
110P / 120P

SIZES
75 X 200MM
150 X 100MM

Emergency Escape Signs



**Fire Exit
(Right) Sign**

CODE
201P / 211P

SIZES
300 X 100MM
450 X 150MM



**Fire Exit
(Up) Sign**

CODE
202P / 212P

SIZES
300 X 100MM
450 X 150MM



**Fire Exit
(Down) Sign**

CODE
203P / 213P

SIZES
300 X 100MM
450 X 150MM



**Fire Exit
(Left) Sign**

CODE
204P / 214P

SIZES
300 X 100MM
450 X 150MM



**Fire Exit
(Up Left) Sign**

CODE
205P / 215P

SIZES
300 X 100MM
450 X 150MM



**Fire Exit
(Down Right) Sign**

CODE
206P / 216P

SIZES
300 X 100MM
450 X 150MM



**Fire Exit
(Up Right) Sign**

CODE
207P / 217P

SIZES
300 X 100MM
450 X 150MM



**Fire Exit
(Down Left) Sign**

CODE
208P / 218P

SIZES
300 X 100MM
450 X 150MM



**Turn Left To
Open Sign**

CODE
209P

SIZES
100 X 100MM



**Turn Right To
Open Sign**

CODE
210P

SIZES
100 X 100MM



**Final
Exit Sign**

CODE
301P


SIZES
100 X 150MM



**Final Exit
(Man Left) Sign**

CODE
302P


SIZES
100 X 150MM



**Push Bar To
Open Sign**

CODE
305P / 306P /
307P / 315P

SIZES
300 X 100MM
450 X 150MM
300 X 150MM
600 X 75MM



**Push Bar To
Open Sign**

CODE
308P

SIZES
600 X 75MM



**Fire Assembly
Point Sign**

CODE
702P / 712P

SIZES
400 X 300MM
600 X 400MM




**Fire Exit
Keep Clear Sign**

CODE
309P

SIZES
450 X 150MM

Fire Action, Equipment and Door Signs



**Fire Action
Standard Sign**

CODE
401P

SIZES
150 X 200MM



**Fire Action
Picto Sign**

CODE
402P

SIZES
150 X 200MM



**Fire Alarm Call
Point Sign**

CODE
501P

SIZES
150 X 200MM



**Fire
Extinguisher Sign**

CODE
502P


SIZES
150 X 200MM



**Fire Hose
Reel Sign**

CODE
503P


SIZES
150 X 200MM



**Fire
Point Sign**

CODE
504P


SIZES
150 X 200MM



**Call Point
Picto Sign**

CODE
505P

SIZES
100 X 100MM



**Fire Extinguisher
Picto Sign**

CODE
506P

SIZES
100 X 100MM



**Fire Alarm Call
Point Sign**

CODE
511P

SIZES
200 X 300MM



**Fire
Extinguisher Sign**

CODE
512P


SIZES
200 X 300MM



**Fire Hose
Reel Sign**

CODE
503P


SIZES
200 X 300MM



**Fire
Point Sign**

CODE
514P

SIZES
200 X 300MM



**Automatic Fire
Door Sign**

CODE
901P


SIZES
100 X 100MM



**Fire Door Keep
Shut Sign**

CODE
902P

SIZES
100 X 100MM



**Fire Door Keep
Locked Sign**

CODE
903P

SIZES
100 X 100MM



**Fire Door Keep
Closed Sign**

CODE
904P

SIZES
100 X 100MM



Alarms



Effective alarm systems support the protection of people, property and assets. From the Commander Site Alarm range, to rotary alarm bells and air horns, our range of alarms provide peace of mind whatever the setting.

Features

- Commander Push Button and Wireless Site Alarm options available
- Various alarm options across the range



Commander Wireless Site Alarm

CODE
EE-AL-002-SIT

WEIGHT
633G

DIMENSIONS (DH)
150 X 234 X 90MM*

ALARM SOUND LEVEL
105DB

SUPER BRIGHT LED STROBE

ABS CASE RESISTS SHOCK AND DROPS

SIMPLE INSTALLATION AND OPERATION

PUSH BUTTON ACTIVATED

IP65 RATED

*(INCLUDING ACTIVATION BUTTON AND STROBE/SIREN)



Commander Single Site Alarm

CODE
EE-AL-001-SIT

WEIGHT
633G

DIMENSIONS (WDH)
150 X 234 X 90MM*

ALARM SOUND LEVEL
105DB

SUPER BRIGHT LED STROBE

ABS CASE RESISTS SHOCK AND DROPS

SIMPLE INSTALLATION AND OPERATION

PUSH BUTTON ACTIVATED

IP65 RATED

*(INCLUDING ACTIVATION BUTTON AND STROBE/SIREN)



Commander Contact Alarm

CODE
AE15

WEIGHT
100G

DIMENSIONS (ØD)
87 X 87 X 43MM

ALARM SOUND LEVEL
85DB-110DB

SIMPLE FITTING AND OPERATION

SUITABLE FOR USE ON THE CS60 AND ALL CABINETS OF ALARM FUNCTION



Rotary Alarm Bell

CODE
AE01

WEIGHT
1.57KG

DIMENSIONS (ØD)
274 X 89.4MM

ALARM SOUND LEVEL
85DB

SUITABLE FOR USE INDOORS AND OUTDOORS

HAND-OPERATED FIRE ALARM BELL

ALUMINIUM ALLOY



Air Horn Alarm

CODE
AE02

ACOUSTIC RANGE
APPROX. 1500M

IDEAL FOR PROVIDING TEMPORARY COVER

IDEAL FOR CONSTRUCTION SITE APPLICATIONS

ALARM SOUND LEVEL
110DB



Smoke Alarm

CODE
AE20

WEIGHT
130G

DIMENSIONS (DH)
110 X 370MM

ALARM SOUND LEVEL
85DB

TECHNOLOGY IONISATION SMOKE SENSOR

BATTERY TYPE 9V ALKALINE

WARRANTY 5 YEARS

CEILING INSTALLATION



Toolkit Essentials



At CheckFire, we supply a comprehensive range of fire extinguisher service toolkit essentials, including year gauge dots, pull-tite seals and pins, all readily available and in stock to support you.

Features

- Vast variety of colour options
- Various pack sizes available
- Custom branded service labels available



Pull Tite Seals

CODE
SP-PS-001 / DP-PS-002

SELF LOCKING
SEAL NO TOOLS
REQUIRED

PROTECTS AGAINST
TAMPERING AND
ACCIDENTAL
DISCHARGE

VARIOUS SIZES
AVAILABLE

AVAILABLE IN VARIOUS
COLOURS



O-rings

CODE
PP1

SIZES
VARIOUS

AVAILABLE FOR CO2,
WATER, FOAM AND
POWDER

AVAILABLE IN
VARIOUS COLOURS



Pin and Ring

CODE
PS03

SIZE
4MM

STAINLESS STEEL

FITS INTO MOST
EXTINGUISHERS

PROVIDES PEACE OF
MIND THAT A FIRE
EXTINGUISHER IS IN
WORKING ORDER



Chubb Type Pin & Indicator


CODE
PS04

PREVENTS THE PIN
FROM FALLING OUT
OF THE HANDLE

SECURES IN
POSITION AND SNAPS
WHEN PIN IS PULLED

CLEARLY SHOWS
WHEN A FIRE
EXTINGUISHER HAS
BEEN USED OR
TAMPERED WITH

AVAILABLE IN
VARIOUS COLOURS



Universal Pin

CODE
PS05 / PS05A

SIZE
4MM
8MM

PROVIDES PEACE OF
MIND THAT A FIRE
EXTINGUISHER IS IN
WORKING ORDER

AVAILABLE IN
VARIOUS COLOURS



Year Gauge Indicator Dots


CODE
ST03

SHOWS THE GAUGE
HAS BEEN TESTED

IN ACCORDANCE
WITH BS5306

AVAILABLE IN
VARIOUS COLOURS
AND CLEAR

PACKS OF 1,000



Fire Safety Log Book

CODE
A4LOG / A5LOG

SIZES
A4
A5

COMPLETED
FOLLOWING
INSPECTIONS,
TESTING AND ANY
MAINTENANCE OF
FIRE SAFETY
EQUIPMENT



Service Labels

CODE
SG001

SIZES
70 X 100MM

VARIOUS PACK
SIZES



Service Tools



At CheckFire, we supply a comprehensive range of fire extinguisher service toolkit essentials, including digital scales and gauge tests, all readily available and in stock to support you.



Engineer's Tool Kit (Standard)

CODE
ST49

1KG SPRING
BALANCE SCALE

2KG SPRING
BALANCE SCALE

25KG SPRING
BALANCE SCALE

10PC ALLEN KEY
SET WITH HOLDER

ADJUSTABLE
SPANNER

COMMANDER HEAD
REMOVAL TOOL

FIREPOWDER
HEADCAP 'T' BAR

MIJA GAUGE TESTER

STANDARD
ENGINEER'S TORCH

RUBBER Mallet

NYLON VALVE
BRUSH


WD40 100ML

'O' RING REMOVAL
TOOL

PETROLEUM JELLY
200G

YEAR INDICATOR
DOTS - CLEAR (PK
1000) 24

TOOLBOX FOR
ENGINEER'S TOOLKITS



Engineer's Tool Kit (Advanced)

CODE
ST50

INCLUDES STANDARD
ENGINEER'S TOOL KIT
PLUS:

25KG SCALES

MAG-LITE (TM)
TORCH

FLEXI INSPECTION
LAMP

STAINLESS STEEL
VALVE BRUSH

LEAK DETECTOR
SPRAY

PLASTIC FUNNEL

V CLAMP



Digital Scales

CODE
ST08

25KG SCALES

HAND-HELD DIGITAL
SCALES

ACCURATE AND
VERATILE TOOL

HAS A TARE AND
READING-HOLD
FACILITY

COMES WITH
PROTECTIVE CASE
AND A BATTERY



Gauge Test - Mija

CODE
ST15

DESIGNED TO TEST
THE PRESSURE
GAUGE

ENSURES THAT THE
GAUGE OPERATES
CORRECTLY

Our services

Going the extra mile for every order



Order & Collect from multiple Depots

Order & Collect from your chosen CheckFire Depot in just 60 minutes.



Ready whenever, wherever you are

Order at a time that suits your work schedule via the CheckFire website.



Dedicated next day delivery service

A personal touch with direct contact, available to both lock-up and commercial premises.



Fire Extinguisher Recycling

Recycling fire extinguishers with CheckFire is simple



1

Arrange collection or drop-off

Arrange a collection of your decommissioned fire extinguishers using our courier service, or simply drop them off if you're local to a CheckFire Depot. Contact our Customer Care Team who will be happy to help.
02920 868 333

2

Safety first

To ensure safety at all times, we ask for your support in adhering to a short list of measures when using our recycling services. You can find this on:

www.checkfire.co.uk/fire-extinguisher-recycling

3

Recycling centre

All extinguishers are processed and decommissioned through our facility and a Waste Transfer Note will be created. Materials are then collected by our fully licensed recycling partner for their onward journey back into the supply chain.

Find out more:



www.checkfire.co.uk



CHECKFIRE GROUP
PANT GLAS INDUSTRIAL ESTATE, BEDWAS, CAERPHILLY, CF83 8DR, UK

T +44 029 2086 8333
E INFO@CHECKFIRE.CO.UK

CHECKFIRE GROUP IS A COMPANY REGISTERED IN ENGLAND AND WALES WITH COMPANY NUMBER 7990436. VAT NUMBER 144 0143 57